




COMANSA

LINDEN 1000


LC-1044

8t

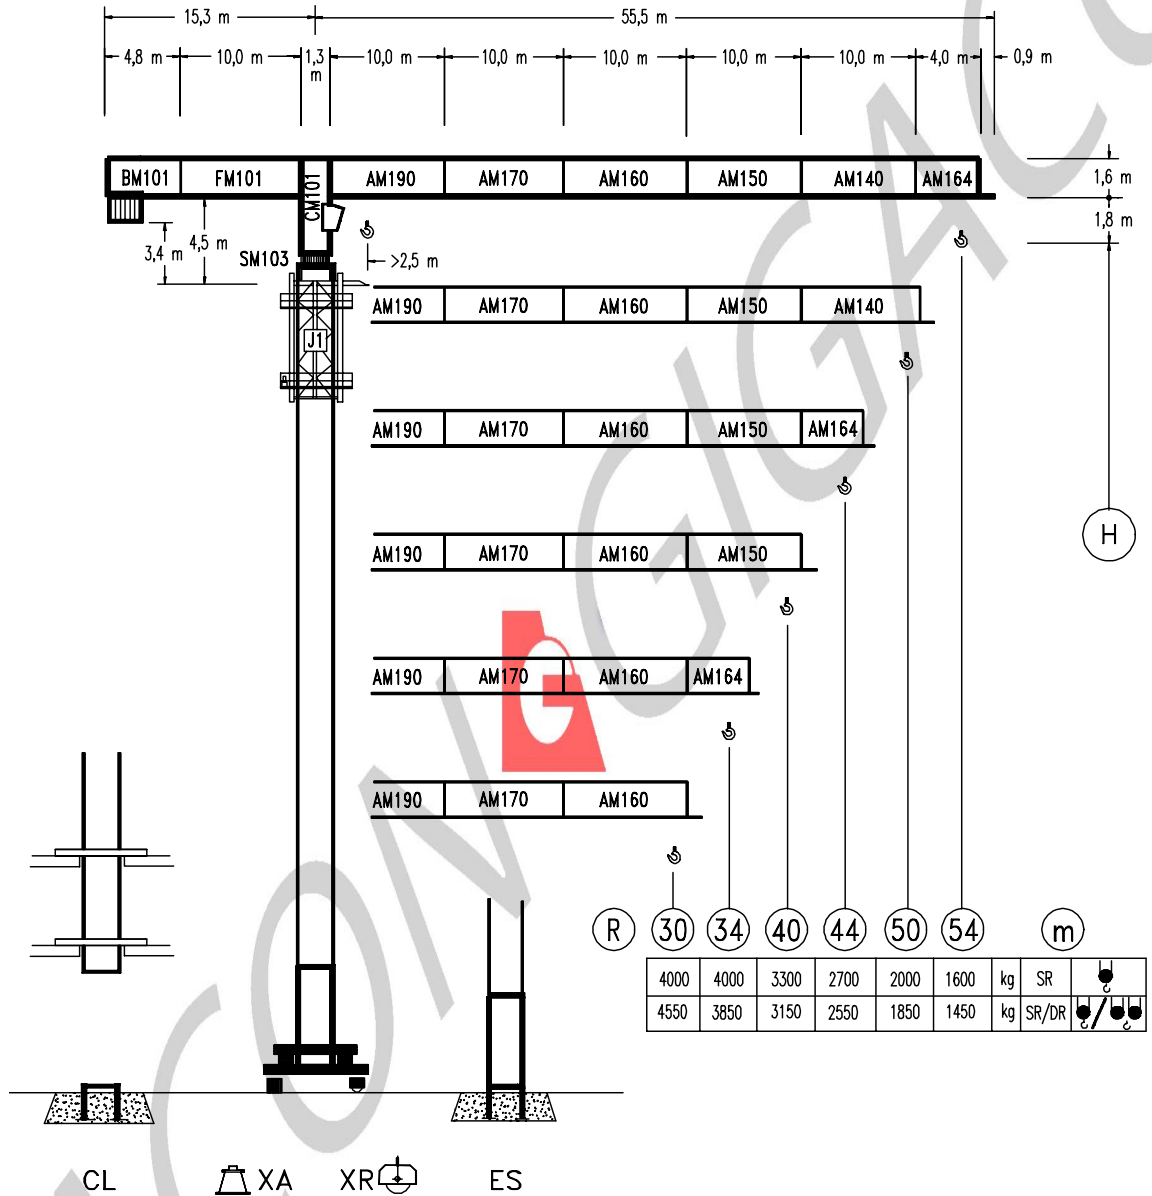

CE
DIN 15018 H1 B3

R	R _(Cmax)	C _{max}	25	30	34	40	44	50	54	m
54	SR SR/DR	25,0 m 13,3 m	4000 8000	4000 3885	3250 3120	2810 2675	2320 2175	2065 1920	1765 1615	1600 1450
50	SR SR/DR	27,7 m 14,7 m	4000 8000	4000 4360	3650 3515	3160 3025	2615 2470	2335 2190	2000 1850	
44	SR SR/DR	31,3 m 16,5 m	4000 8000	4000 5005	4000 4050	3635 3495	3015 2870	2700 2550		
40	SR SR/DR	33,8 m 17,8 m	4000 8000	4000 5455	4000 4425	3970 3825	3300 3150			
34	SR SR/DR	34,0 m 17,9 m	4000 8000	4000 5490	4000 4455	4000 3850				
30	SR SR/DR	30,0 m 18,2 m	4000 8000	4000 5605	4000 4550					

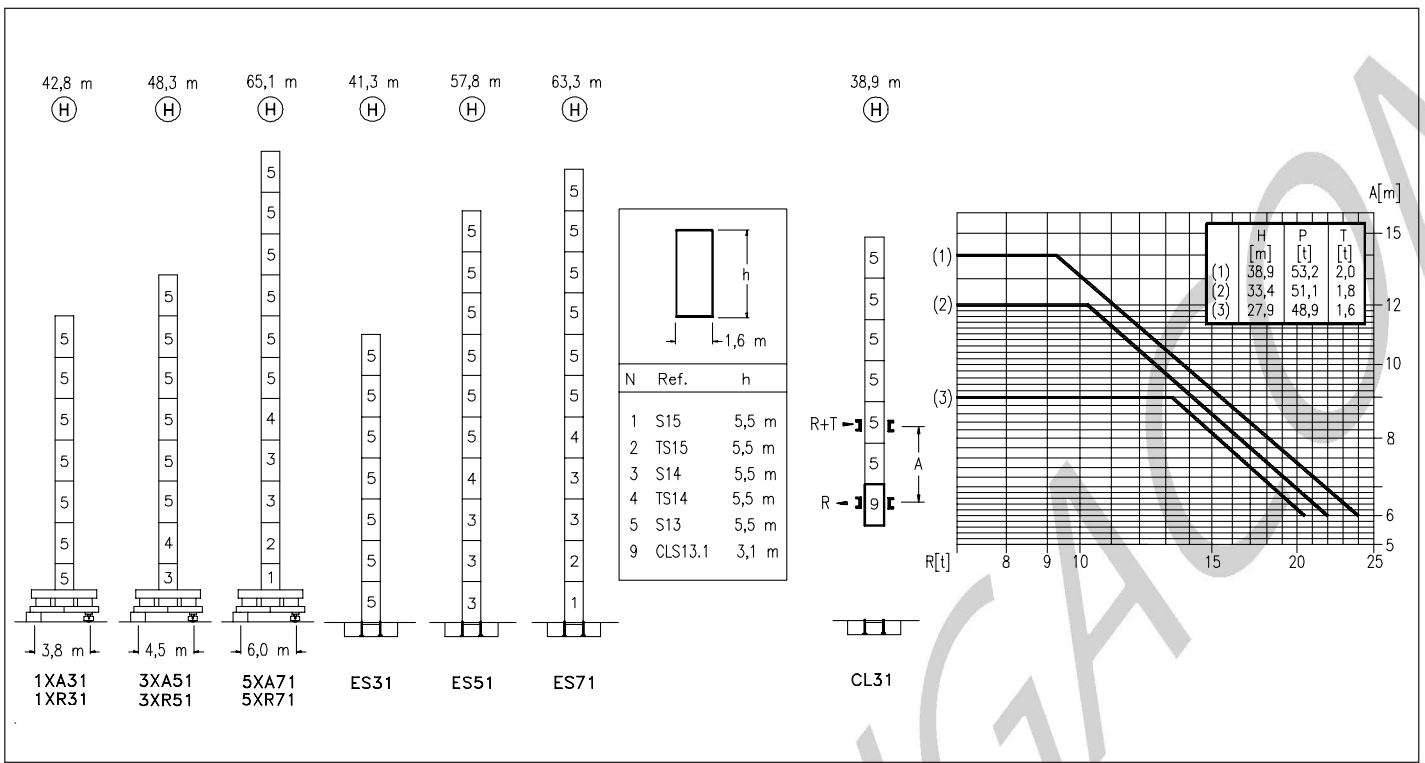

CS3-3.7
3,7 kW

10 m/min
33 m/min
66 m/min

CFU-4.0
4 kW

0 \varnothing 66 m/min

GR-12
120 Nm

0 \varnothing 0,7 rpm

TS2-5.5 | **TRA-7.5**
2 x 55 Nm | 2 x 75 Nm

0 \varnothing 20 m/min

1XR31 | 3XR51 | 5XR71

TRA-7.5VC
2 x 75 Nm

0 \varnothing 20 m/min

5XR71

ES3-25-20
25 kW

		I	II	III
SR	m/min	7	28	56
	t	4	4	2
DR	m/min	3,5	14	28
	t	8	8	4

EFU2-24-20
24 kW

EFU2-37-20
37 kW

ES3-33-20
33 kW

		I	II	III
SR	m/min	9	36	72
	t	4	4	2
DR	m/min	4,5	18	36
	t	8	8	4

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	-------------------------------

Opcional
Optional
En option
Kaufoption

R. máx.	En servicio In operation En service In Betrieb	1XR31 66,9 t 3XR51 61,5 t 5XR71 75,2 t
----------------	---	--

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	1XR31 76,3 t 3XR51 84,7 t 5XR71 118,6 t
----------------	---	---



Construcciones Metálicas COMANSA S. A.
Polígono Industrial de Areta
E-31620 Huarte-Pamplona.- SPAIN
Tel.: (34) 948 335 020 - Fax: (34) 948 330 810
e-mail: info@comansa.com